

# Future Generations University

*Research, Learning, Action for Inclusive & Sustainable Change Worldwide*

## Tapping Walnut Trees: Making Walnut Syrup for Fun or Profit by Mike Rechlin



Jordan Mongold at Mongold's Walnut Research Farm, courtesy of Nikki Bowman Mills of WV Living Magazine

Based on research conducted in partnership with the West Virginia Department of Agriculture, the United States Department of Agriculture's National Agroforestry Center, and the USDA National Institute of Food and Agriculture.



**United States Department of Agriculture**  
**National Agroforestry Center**

**North Mountain Campus:** 400 Road Less Traveled, Franklin, WV 26807 USA | Ph: 304.358.2000 | [www.Future.Edu](http://www.Future.Edu) & [www.Future.Org](http://www.Future.Org)  
**Regional Offices:** Kathmandu, Nepal | Madidi National Park, Bolivia | Lima, Peru | Punta del Este, Uruguay | Denver, Colorado

## Introduction

Everyone knows you can tap maple trees, boil down the sap and make maple syrup. Maple syrup on pancakes is a classic American breakfast. However, few people know that the same is true for other select species of trees. People in the sub-arctic have for years tapped birch trees, both boiling the sap to make a sweet syrup and consuming it raw as a health drink. Walnut trees are on that list of those select other species. Members of the *Juglans* genus, black walnut (*Juglans nigra*), white walnut or butternut (*J. cinerea*) and English walnut (*J. regia*) have all been tapped for syrup production.

Each species produces a sap and syrup with unique characteristics and flavor. Although at first thought one might imagine walnut syrup as having that harsh, slightly bitter flavor of the nut, and possibly the allergic reaction many people experience with nuts in general, it turns out that neither is the case. Walnut syrup has been described as having a smooth slightly earthy flavor, getting bolder as the sap flow season progresses. Concerning allergic reactions, research conducted at the Cincinnati Children's Hospital Medical Center (Lierl et.al., 2019) showed that walnut syrup does not contain the allergenic protein causing a reaction in individuals allergic to walnuts.

Walnut syrup is a specialty product, with a special taste, and it is developing a niche market of its own. With a retail price of \$7/oz (<https://tonolowayfarm.com/store/>) you probably are not going to want to slather it on your pancakes. More often the flavor tones of walnut syrup are blended with other syrups (<https://newleaftreesyrups.com/>) or used in the manufacture of other products (<https://coopersdaughter.distilleryspirits.com/product.aspx?item=WalnutBourbon>) to add a unique flavor and increase the market price of those products.

You can make walnut syrup commercially, but to do that you will need a lot of walnut trees. There are a limited but growing number of commercial walnut syrup producers. You can make walnut syrup for fun, as a backyard hobbyist, with as few as 5 walnut trees. As with maple syrup, many people start out as a hobbyist and grow as they "catch the sugaring bug" and find

# Future Generations University

more trees. If you start as a hobbyist, think of the fun you'll have by treating your family, friends, or neighbors to a stack of pancakes slathered with your own \$7/oz walnut syrup.

This walnut syrup primer will get you on either the commercial or the hobbyist path. A lot is known about tapping maple trees. The University of Vermont's Procter Maple Research Center has been learning and improving maple tapping practices for over 50 years. Much less is known about making walnut syrup; the earliest published study only dates back to 2006. This primer references what is currently known about tapping walnut trees and making walnut syrup. As more studies are conducted on walnut syrup and more people start tapping walnut trees, more knowledge is gained about increasing sap production and processing efficiency. To connect to fellow walnut syrup makers and to add what you're learning to the collective knowledge, check out the Black Walnut Syrup Makers Facebook page. To get going, just keep reading.

## Why tap walnut trees?

One reason to tap walnut trees is that you have walnut trees to tap. Sugar maple is a northern tree, plentiful in New England, eastern Canada, and down the Appalachian Mountain chain at higher elevations and on cool, moist north slopes. Red maple (which can also be tapped) is widely distributed throughout the east. Walnut is not prevalent in the northeast, instead becoming common south of the maple-beech-birch forests of the north. As shown in Figure 1, black walnut is common in the mid-Atlantic states and into the Midwest. Don't have maple? There is a good chance you have walnut.



Figure 1 – Black walnut (*Juglans nigra*) range map.


Walnut is a fast-growing tree, and although commonly referred to as a bottom-land species, it also thrives higher on the slopes especially on abandoned farmland. As with acorns, the nuts are largely distributed and planted by forgetful squirrels who make off with the nuts, cache them, then can't remember where they put them. In West Virginia, it is common to find slope side patches of monocultural walnut trees on abandoned pasture lands with a heavy grass or brush groundcover. Walnut trees are also prevalent along fence rows, which makes them nicely lined up for running sap collection tubing.

My forester friends pose a slightly different question. They would ask "why on earth would you ever drill a hole in a walnut tree?" That is a good question. Walnut is a high-value timber species. I would never recommend tapping a high value veneer quality walnut log. However, not all walnut trees are high value veneer quality. If it is sawlog quality, and you only drill into the sapwood, then most—or all—of the tapholes will end up in the slab pile. There are also crooked trees, trees with heavy crowns and short bowls, perfect for tapping but without much timber value, trees along fence lines that might have nails or fence staples in them, or favorite trees you would never think of cutting down but might not mind tapping. You can also tap low on the tree, any cut tree leaves a stump, or tap a low hanging branch. Tapping walnut trees provides an intermediate income while you are waiting for the tree to mature. It can take 50 or more years to grow a walnut tree with a good sawlog. For those of us without that much patience, you could start tapping at 10 years.

## How to tap walnut trees?

What is known about tapping walnut trees, or any other alternative species for that matter, pretty much comes from knowledge gained from tapping maple trees. However, walnut trees are a very different species, and researchers and practitioners are just starting to learn how to accommodate that difference when tapping.

Wood anatomists classify maple as a “diffuse porous” hardwood. In maple trees small vessels, commonly called pores, carry water and nutrients up the tree in the summer and carry sweet sap to your tap during the sugaring season. These vessels are diffused, or evenly distributed, throughout the tree’s annual growth ring. Walnut trees, on the other hand, are classified as a “semi-ring porous” species. They have small, diffused pores like maple, but also large pores – as in true “ring porous” species such as oak and hickory – that are more prominent in the early annual growth or springwood (Figure 3).

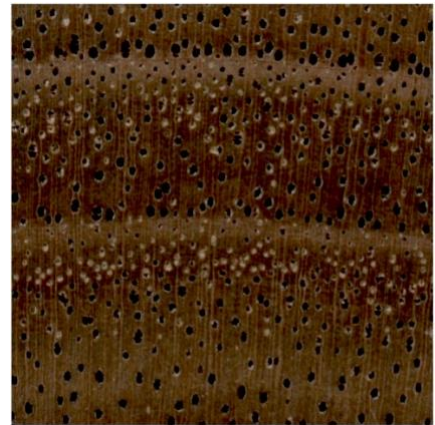

*Figure 3 – Walnut heartwood showing vessel structure*

As anyone who has ever looked at the end of a walnut log can tell you, walnut trees have a large very dark heartwood area (Figure 4). This heartwood is the valuable wood in the tree. The heartwood is surrounded with a small outer band of white sapwood. A walnut tree commonly has 11 – 13 annual rings of sapwood, when a new sapwood ring is formed, the innermost sapwood ring begins its conversion to heartwood. Heartwood is dead, whereas sapwood contains dead and live cells. The width of the sapwood layer is proportional to the growth rate of the tree. A fast-growing tree will have a thick sapwood band because each annual ring is thick. Similarly, a slow growing tree will have a relatively narrow sapwood band. This is important because the thickness of the sapwood has been found to be the best indicator of



*Figure 4 – Walnut heartwood (brown) and sapwood (white).*



the amount of sap production (Naughton, 2006). Studies have found that on the average you can expect to get 2 – 3 gallons of sap/year from a walnut tree (Table 1).

*Table 1- 2020 Walnut seasons sap production using a gravity bucket system comparing Stainless Steel walnut spouts to standard maple spouts (Rechlin et.al., 2020).*

Farmer	SS walnut spouts gal/tap	Maple spouts gal/tap
#1 Christoph Herby	2.8	1.5
#2 Chip Matheny	3.2	1.5
#3 Elton Bowers	3.0	3.2
Average	3.0 gal/tap	2.1 gal/tap

A young healthy maple tree, on the other hand, can have mostly sapwood, and when tapped can produce over 10- gallons of sap per year.

Sap sweetness is measured in Brix, which is just the percent sugar in the sap. The amount of sap needed to make a gallon of syrup finished to 66 Brix, the legal lower limit for maple syrup, is determined through the application of Jones rule of 86 (86 divided by the brix of the sap = the number of gallons of sap needed to make a gallon of syrup.) In West Virginia, numerous studies have shown that our walnut sap has been running from 1.5 to 1.0 Brix. Meaning, it takes anywhere from 57 to 86 gallons of walnut sap to make a gallon of walnut syrup.

Finally, maple and especially sugar maple, also called “hard maple” or “rock maple,” is a very hard wood. Walnut, on the other hand, is a comparatively soft wood. All this; vascular structure, thickness of the sapwood layer, and hardness of the wood impact how walnut trees are tapped, how much sap can be expected, and how to improve sap productivity.

Future Generations University has been working with walnut syrup producers and studying walnut sap flow since 2018. The tapping and syrup making recommendations that follow are based on that work while drawing on other research and the accumulating knowledge of the walnut tapping community.

When to tap: Maple trees are tapped when there is the highest probability of getting the temperature swings, above freezing periods (days) followed by below freezing periods (nights), that initiate sap flow. That tends to be the waning days of winter and early spring, varying with

latitude and elevation. Maple sap flows because of a pressure buildup in the trees during that period. The same holds true for walnut, with stem pressure initiating sap flow when tapped. Maple will build up stem pressures exceeding 20 pounds/sq. in. In a study conducted during the 2021 sap flow season it was found that walnut built up to approximately 5 pounds/sq. in. of pressure (Figure 4).

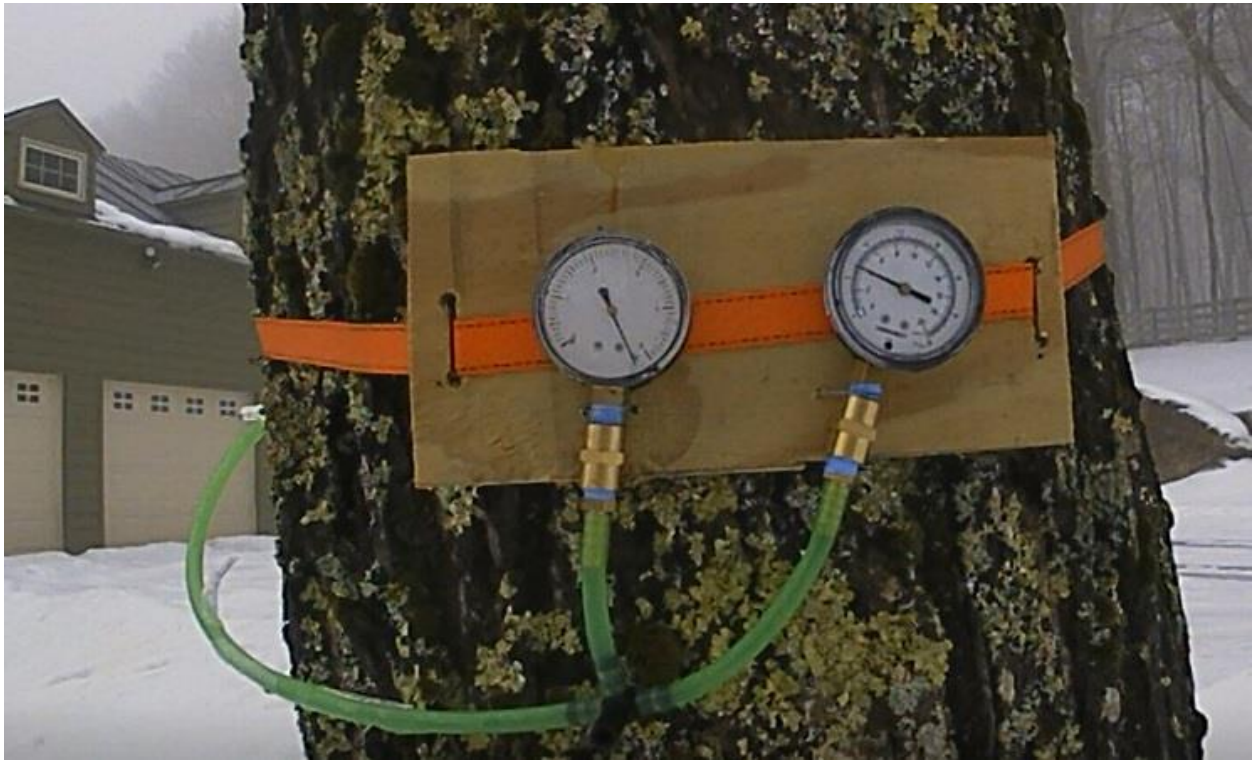


Figure 4 – Pressure gauges on a tapped walnut tree, the left, more sensitive gauge is pegged at 5 pounds and the right gauge reads 4 pounds.

To complicate matters, a research team working on xylem pressures in English walnut (*Juglans nigra*) found that walnut trees not only develop stem pressure, but also root pressure (Ewers, et.al., 2000). Root pressure is the mechanism responsible for sap flow in birch trees, where sap flows later in the spring, after the freeze/thaw period. They found walnut root pressure developing in the fall and in the spring, which leaves open the opportunity for walnut sap flow before and after the traditional maple and walnut tapping period. We have documented late spring sap flow events, but they tend to be of short duration and when boiled down yield a syrup that tastes different from that produced by runs produced by stem pressure (Herby, 2022).

However, more work is needed before counting out an extended productive sap flow season. Individual producers have reported success in fall tappings.

Depth of the taphole: Gary Naughton (2006) studied various factors that influence the amount of sap a walnut tree exudes when tapped. His study showed that the best predictor of sap flow was thickness of the sapwood. This differs from maple where the best predictor of sap flow is tree basal area (related to diameter) and proportional to crown size. In maple, larger diameter trees are predicted to yield more sap. However larger diameter trees are not necessarily faster growing trees, and sapwood layer thickness is related to tree growth. The trees the university has worked with tend to have 2-3 inches of sapwood. A walnut tree with a sapwood thickness of 3 inches would be growing close to 0.3 inches of radial growth or almost 2/3 inch of diameter growth per year. That is a fast-growing tree. It could be a fast-growing young tree or an older larger open grown tree on a rich site.

Standard maple tapping practice has been to drill a 1.5-inch-deep taphole, recent research is suggesting tapholes of 2-inches. In walnut, it is recommended to drill through the sapwood to the heartwood. There is no need to go any deeper, the heartwood is dead and yields absolutely no sap. To do that you have to know the thickness of the sapwood of your trees. As a practical measure drill depth is being set at 2.5 inches for walnut trees. It is important to place your drill in a bark crevice. Otherwise, with the thick bark on a walnut tree you could use up an inch of that depth before you reach the wood. Reduce that measurement if you frequently pull out dark brown heartwood shavings.

Spouts, spiles or taps (all names for the same thing): The ideal spout for tapping walnut trees has yet to be developed. However, stay tuned, because through a WVDA Specialty crop block grant, the university is working on it. In Figure 5, you see a prototype stainless steel walnut spout. Using this spout and modified tapping guidelines, taps are averaging 3 gallons of sap each.



*Figure 5 – prototype stainless steel (SS) walnut spout*



Figure 5 shows a 7/16-inch spout with a 3/4-inch longer barrel than the standard maple spouts. In recent years Maple syrup producers have switched from 7/16-inch diameter spouts to smaller 5/16-inch diameter spouts called a health spout or a tree saver spout. The smaller diameter spout causes less internal damage to the tree and heals over more quickly. Sustainable tapping guidelines have been developed with the assumption that the producer is using the smaller spout. Future Generations has a study in progress to develop sustainable walnut tapping guidelines. Initial results, illustrated by Figure 6, indicate that the compartmentalization of decay in walnut results in much less dead wood than in maple, with the taphole sealing over faster due to the faster growth rate of the tree. This may justify the use of the larger diameter spouts



Figure 6 – Compartmentalization of decay and healing over of taphole after one year.

As shown in Table 1, the prototype 7/16-inch diameter walnut spouts along with revised tapping guidelines led to almost 50% more sap. The problem for commercial producers is that those stainless-steel spouts are expensive. Our ongoing work with the Robert C. Byrd Institute of Advanced Manufacturing at Marshall University is leading to the development of a much cheaper injection molded spout specifically for tapping walnut trees.

Vacuum: In Maple trees the application of vacuum to a tubing system increases sap yields by 5-

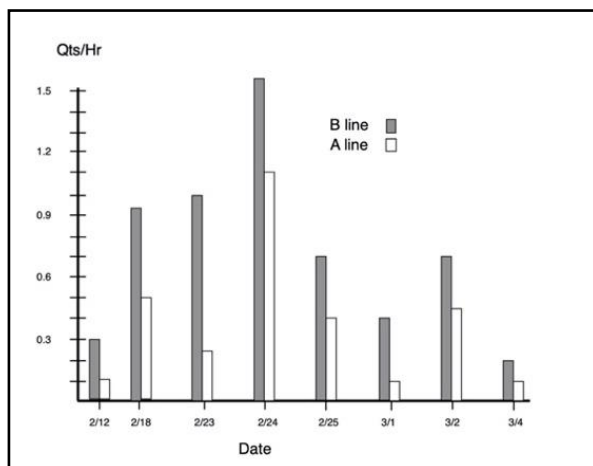


Figure 7 – Controlled study of walnut sap flow Line A – without vacuum, Line B- with vacuum (Rechlin, 2921).

7 percent per inch of vacuum applied. Research conducted during the 2020 and 2021 sap flow seasons on 20 trees showed that the application of only 8 inches of vacuum doubled walnut sap flow (Figure 7) in walnut trees. This again appeared to be the case where sap was measured at a commercial walnut syrup producer with 500 plus trees on tap (Table 3). Here sap flow was greatly increased once the vacuum pumps were installed. It should be

noted that Table 3 represents field observations, where many conditions could have influences sap flow, whereas Figure 7 represents a controlled study. Either way, it seems as if vacuum works to increase sap flow.

Vacuum can be obtained through a system that uses a vacuum pump and releaser, traditionally using 5/16-inch diameter tubing. Vacuum can also be achieved through a “natural vacuum” system, that relies on elevation change from tree to collection tank, and a tube full of sap to, pull the sap out of the tree. The latter is generally achieved in a narrower 3/16-inch tubing system. Some producers combine elements of both, creating a hybrid vacuum system. In a 2021 study, using paired spouts on 20 trees, it was found that when using artificial vacuum 5/16-inch tubing produced 7% more sap than 3/16-inch tubing (FGU, 2021).

However, that leaves the question of using “natural vacuum” on 3/16-inch tubing for the collection and augmentation of walnut sap flow. During the 2018 and 2019 sap flow seasons, natural vacuum systems were tried, with plenty of slope, and were not able to develop over 5 inches of vacuum, whereas in maple you would expect to get over 20 inches of vacuum. During that time, it was noticed that walnut sap has a much higher percentage of gas bubbles in the sap lines than does maple. Many factors influence the amount of gas bubbles in the sap lines,

but in maple the line is primarily full of sap whereas in walnut the sap line is primarily full of gas. It has been the working hypothesis that the excessive gasses in the sap are due to the presence of the large pores in the semi-ring porous anatomical structure of the wood (Rechlin, et. al, 2019) However, there is another possibility, and that relates to a specific problem with tapping walnut trees.

Date	Gal sap	
2/3	110	
2/4	30	
2/8	20	
2/9	80	
2/10	75	
2/11	25	
2/16	100	Vacuum pump on
2/16	100	
2/17	100	
2/20	170	
2/21	150	

*Table 2 - 2022 season sap collection data from walnut syrup producer Gary Mongold's farm*

The walnut tapping problem: Maple, being a hard wood, holds spouts properly tapped into the tree very well. It is unusual to have air leaks on more than 1% of your spouts. Walnut, however, is different. It is a soft wood with thick bark. Over four years of research, there have been consistent problems with walnut spouts leaking. It's not that they leak sap, but that the spouts don't seal well, causing an air leak in what is a supposedly tight system. Those initially tight spouts that developed vacuum leaks, when tapped in further seal well for a while. This is a serious problem for walnut syrup producers. It is impossible to hold a tight vacuum system with leaky spouts. To maintain acceptable levels of vacuum, producers need to spend an inordinate amount of time leak checking their system. Some have noted that by the end of the season some of their spouts are driven in all the way to the back of the taphole. The further you drive a spout into the taphole the more of the vessels delivering the sap are sealed off, decreasing sap flow.

After initially surmising that the problem was due to sap freezing and backing the spouts out of the taphole, an occurrence known to maple tappers, researchers now feel that the issue is the wood surrounding the taphole drying out and shrinking as the season progresses.

At this time the only spouts available have been designed for maple. Future Generations is working with the Robert C Byrd Institute of Advanced Manufacturing to design a walnut specific spout designed to overcome the issues unique to walnut tapping. There are plans to have several designs tested by walnut syrup makers in the 2023 season in the hope of reducing the leak problem. In the meantime, the best that can be done is to use the most appropriate maple spouts. The present recommendation is to use a maple spout with as much taper as possible. A more tapered spout should seal better and be able to be re-sealed without being driven as far into the taphole as a spout with less taper.

## How to make walnut syrup?

Walnut sap boils pretty much like maple sap. It starts at 1 to 1.5 Brix, and you achieve finished syrup at 66 Brix. Going from 1% sugar takes a lot of boiling, meaning a lot of time at the evaporator and a lot of energy to sustain the rapid boil needed to get the job done.

Maple syrup producers have reduced the boiling time needed to make syrup by first concentrating the raw sap in an RO. RO stands for reverse osmosis, and the machine that does it is basically a semi-permeable membrane and a pump. Walnut syrup producers have not been able to use an RO because of the presence of what is presumed to be pectin in the sap.

Pectin and the pectin problem: Pectin is a long chain, high molecular weight, polysaccharide

(Figure 8). The problem is that it gums up the pores on the RO's semipermeable membrane, and when trying to filter the final product it gums up the filter. Also, if you're not careful, your valuable walnut syrup can turn into walnut jelly, which of yet has no established market.

In research conducted by Future Generations University in conjunction with Marshall University and West

Virginia State University, it was found that this substance could be spun out of walnut sap. A 2 mL sample spun in a lab centrifuge at 14,500xg for 5 minutes and produced a visible pellet of a translucent gel like substance that is presumed to be pectin (Odell, 2021). Further work with a larger centrifuge spinning at 4,700xg for 6 minutes produced a correspondingly larger pellet. Researchers are in the process of analyzing a composite sample to confirm the presence of pectin. Both these centrifuges were batch processors, spinning a set volume of sample for a defined time.

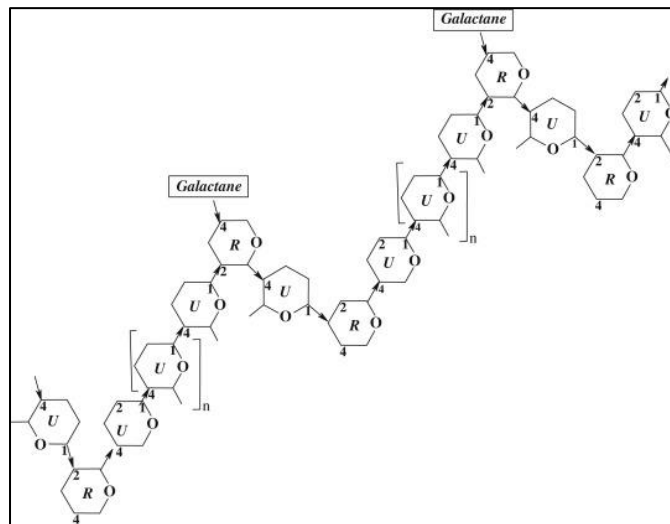


Figure 8 – Pectin molecular structure

# Future Generations University

In the meantime, field tests were conducted with a walnut syrup producer using an off-the-shelf continuous feed “Extreme Raw Power” centrifuge designed for clarifying waste oil and used to remove algae cells from pond water. This centrifuge spun at 2,800xg, and was set to process 1 gallon of sap/minute.

The waste port from the centrifuge drained off a milky substance that was presumed to contain some, but not all, of the pectin. The final product still contained a substantial jelling agent that had to be filtered out.

The spun sap was then run through a Next Generation single post RO twice and boiled to 66 Brix. Each trial was boiled immediately after concentrating with the RO. Looking at the totals, the 300 gallons of raw sap would have taken 16 hours to evaporate using a 2x4 Next Generation propane fired evaporator with an evaporation rate of 18.6 gallons/hour. Instead, after centrifuging and concentrating to 75 gallons, it only took 4 hours to make the syrup. The fuel cost for the season was \$42/gallon of syrup produced. Boiling 300 gallons of 1.3 Brix sap would have yielded 4.5 gallons of syrup (Jones rule of 86). Fuel cost for those 4.5 gallons would be \$189. Instead, by concentrating first and only having to boil 75 gallons, the producer used \$47.25 worth of propane, or \$10.50/gallon of syrup produced.

*Table 3 - Walnut sap centrifuged and concentrated with an RO*

Date	Centrifuged sap (gal)	Concentrated to (gal)	Final concentration Brix
2/21 +2/22	150	28	4.0
2/23	40	6	3.7
2/27	50	22	4.0
3/1	60	19	5.0
	300 Total	75	4.2 average

Much of the research cited in this primer, especially work related to tapping walnut is based on preliminary studies and observations. A sap flow season lasts approximately 6 weeks, and it takes multiple sap flow seasons to substantiate results. Future Generations University and others are committed to continuing this work. There are now three walnut syrup producers



# Future Generations University

with over 500 taps each in this area of West Virginia and Virginia. There is an opportunity to augment the vibrant maple syrup industry in Appalachia with a growing walnut syrup producing industry.

The purpose of this primer is to provide aspiring walnut syrup producers, be they hobbyists making walnut syrup because it is fun, or those looking at walnut syrup production as a business, with what is currently known. Hopefully, that knowledge will get you going in the right direction. To stay current with what the university is finding about tapping walnut trees, keep up with new material posted at [www.future.edu/maple](http://www.future.edu/maple), the North American Maple Syrup Councils research site at [www.mapleresearch.org](http://www.mapleresearch.org) (search for walnut) and become a member of the Black Walnut Syrup Makers Facebook group at <https://www.facebook.com/groups/2965351326865418/>.

Most importantly, in the waning days of winter, drill a hole in a walnut tree, see what happens and report back. That way, everyone can learn together and have fun doing it. Reach out at [syrup@future.edu](mailto:syrup@future.edu).

## Citations

Ewers, Frank, Thierry Ameglio, Herve Cochard, Francquis Beaujard, Michel Martignac, Marc Vandame, Christian Bodet and Pierre Cruiziat. *Seasonal variation of xylem pressure of walnut trees: root and stem pressures*. Tree Physiology (21) 2001.

Future Generations University. 2021. *Walnut and the Pectin Problem*. An unpublished review.

Herby, Christoph. 2022. Personal communications.

Lier, M.B., Assa'ad, A.H., Jennings, J., & Hardie, W.D. 2019 "Walnut Syrup is not Allergenic in Individuals with a Documented Walnut Allergy". *J Allergy Clin Immunol*. 143:2 AB789

Naughton, G.G., Geyer, W.A., & Chambers IV, E. 2006. "Making Syrup from Walnut Sap." *Transactions of the Kansas Academy of Science*. Vol 109, no.3/4.

O'dell, Hayden and Derrick Koelling. "Progress reports on pectin analysis of walnut sap" by Marshall University on a sub-contract to Future Generations University for a USDA NE SARE grant, LNE 20-410R.

Rechlin, M. and Kate Fotos, 2021. "Tapping Walnut Trees: Studies on Walnut Sap Flow." *Maple Syrup Digest*. 13-20

Rechlin, M. 2021. "Tapping into Sappy Non-Timber Forest Products." *National Woodlands*. 18-19

Rechlin, M. Herby, C., Matheny, C., and Milnes. 2020. "Research into Designing a Walnut Specific Spile." <https://www.future.edu/syrup-resources/>

Rechlin, M., Cabral, M., Fotos, K., and Herby, C. 2020. "The Effect of Vacuum on Walnut Sap Flow." <https://www.future.edu/syrup-resources/>

Rechlin, M. 2019. "Walnut Sap Flow and Syrup Making Field Trail." <https://www.future.edu/syrup-resources/>